TELECAMERA






SMART CAMERA

Quick Manual for Android and iOS


After open packing list box, please check product body and

Packing list



Interface

Before use, please pay attention to the interface and button of camera.

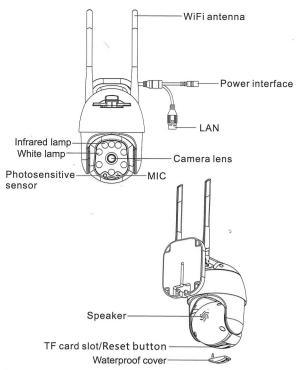

Reset button: Long press to restore the camera to factory settings.

Operation


1.Download APP

Tips one: Scan QR code.



Tips two: Search "iCSee" in the App store and download.

Use the power adapter to connect the camera power interface and the power socket, As shown in the figure below.



If you need local storage, please install the memory card firstly, then power on the device (the memory card does not support hot swapping, please plug and unplug the memory card when the device is powered off). Cloud storage is recommended, which is safe and convenient. Details See "Step 4" for operation.


3. Camera configuration

1. Wireless network configuration:

01.User login

- Connect your phone to WiFi.
- Open the iCSee app, register an account and login(Figure 1).

Figure 1



02.Quick configuration

- After successful login, Click the "+" button (Figure 2).
- Click the "WiFi Camera" (Figure 3).
- Set network configuration according to the camera's voice prompts and the APP interface step-by-step guide. When the camera emits a "Connect router successfully" prompt, it means that the camera has successfully configured the network.

Note: If the camera does not have a prompt sound for a long time, you can press and hold the camera Reset button until you hear the prompt "Restore factory settings, please do not power off "and release it to restore the camera to factory settings and then configure the network.

Figure 2

Figure 3





- · After the network configuration is successful, follow the instructions on the APP interface to set the camera password and name.
- After the configuration is completed, the device is displayed in the device list interface. Click to open the real-time preview screen, and carry out relevant operations and settings (Figure 4).

Figure 4



2. Wired network configuration:

Note: If you choose to use network cable to connect the camera, please configure it as follows.

- After successful logm, Click the "+" button (Figure 2).
- Click the "Other pairing network and adding methods", Click the "Nearby Cameras" (Figure 5,6)
- Enter the device search interface and click the searched camera to add a device (Figure 7).

 After the configuration is completed, the device is displayed in the device list interface. Click to open the real-time preview screen, and carry out relevant operations and settings(Figure 4).



Figure 5





4.Cloud storage

 Steps to open cloud storage: click the "cloud storage" or "cloud" icon in the device list interface (Figure 8), and follow the guidance of the app interface to understand and open the cloud storage package, with a variety of packages available.

Figure 8



8